

# SCC-B5310/B5311 SCC-B5313/B5315

1/3" Color Fixed Dome Camera





- Horizontal resolution : 540 TV Lines
- Minimum scene illumination :  
(SCC-B5310 : 0.001Lux  
SCC-B5311/B5313/B5315 : 0.002Lux)
- Horizontal and vertical mirroring
- 3-Axis Design
- DNR (Digital Noise Reduction)

## Specifications

Model	SCC-B5310		SCC-B5311	SCC-B5313	SCC-B5315
Camera Type	1/3" Day & Night Color Fixed Dome Camera				
Image	Device	Super-HAD IT CCD			
	Effective Pixels	NTSC	510(H) x 492(V)	768(H) x 494(V)	
		PAL	500(H) x 582(V)	752(H) x 582(V)	
Scanning	System	NTSC : 525 Line, 2:1 Interlace / PAL : 625 Line, 2:1 Interlace			
Minimum Scene Illumination	Color	0.001Lux	0.002(Sens up 128X, 15IRE)Lux		
	B/W	0.001Lux	0.002(Sens up 128X, 15IRE)Lux		
Functions	Day & Night	Yes(Electric)			
	Sens Up(LSS)	Off, AUTO 128X			
	H/V Reverse	Yes(On/Off)			
	DNR	Yes(On/Off)			
Horizontal Resolution	330TV Lines	540TV Lines			
Video Output	VBS 1.0Vp-p (75Ω, composite)				
Lens	Focal Length	3.8mm		3.0mm	8.0mm
	Viewing Angle	Horizontal	71°	92°	33.6°
		Vertical	53°	72°	25.3°
	PAN / TILT	0°~340° / 0°~90°			
Operating Temperature	-10°C~50°C				
Operating Humidity	Within 90% RH				
Power Requirement	AC24V / DC12V compatible				
Power Consumption	1.6W				
Weight	190g				
Dimensions	102(ø) x 78(H)mm				
Body Color	White	SCC-B5310	SCC-B5311	SCC-B5313	SCC-B5315
	Black	SCC-B5310B	SCC-B5311B	SCC-B5313B	SCC-B5315B

\* SCC-B5310 is only available in NTSC.

## Dimensions (unit:mm)

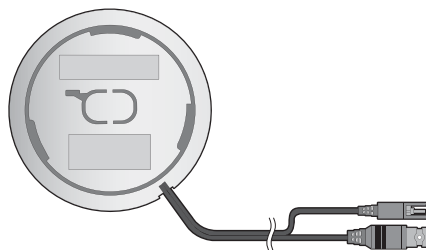

\* Design and specifications are subject to change without notice.



SAMSUNG ELECTRONICS CO., LTD.

Digital AV Division  
VSS marketing, 416, Maetan 3 Dong, YeongTong-Gu, Suwon City, Kyeonggi-Do, Korea, 443-742  
Tel: +82-31-277-3342-3347 Fax: +82-31-277-6597 www.samsungsecurity.com