


DATASHEET

TBK-DVR1300 SERIES



MAIN FEATURES

- H.265 Pro+ encoding.
- 5 in 1: HDTV/AHD/CVI/CVBS/IP.
- 4/8/16 HD inputs at up to 4K resolution.
- Up to 8/16/32 IP cameras (at up to 4K resolution).
- Smart functions: line crossing and intrusion detection.
- RS-485 port.
- Alarm In/Out, 4 Audio in, Bidirectional audio.

5 in 1 digital video recorders, supporting up to 4K resolution for HD inputs. Hybrid recorders, they allow to deactivate the HD inputs to convert them into IP channels, apart from supporting additional IP channels.



NOVUM

These DVRs belong to **novum** product range. This product range includes as well NVRs and IP cameras, with a common software platform, and constitutes an important technological renovation. The platform allows access to the devices in a simple way, and supports the P2P service, which eliminates the need to open ports, greatly simplifying the installation.

TBK Novum Management Software allows to centrally manage the devices from several installations (both recorders and cameras), with support of multiple monitors, maps, and event management. The TBK SuperVision smartphone application (TBK SuperV) also provides the flexibility and mobility necessary to monitor CCTV installations from a mobile phone or tablet, with notifications in case of alarm, thanks to push technology.





TBK-DVR1300 SERIES

SPECIFICATIONS


MODEL	TBK-DVR1304	TBK-DVR1308	TBK-DVR1316
RECORDING			
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264		
Encoding resolution	8 MP/5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF		
Frame rate	Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)		
	Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)		
Video bit rate	32 Kbps to 10 Mbps		
Dual stream	Support		
Stream type	Video, Video & Audio		
Audio compression	G.711u		
Audio bit rate	64 Kbps		
VIDEO AND AUDIO			
IP video input	4-ch (up to 8-ch)	8-ch (up to 16-ch)	16-ch (up to 32-ch)
	Up to 8 MP resolution		
	Support H.265+/H.265/H.264+/H.264 IP cameras		
Analog video input	4-ch	8-ch	16-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
HDTVI input	8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25		
AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30		
HDCVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30		
CVBS input	PAL/NTSC		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
HDMI/VGA output	1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	1-ch, RCA (2.0 Vp-p, 1 KΩ)		
Audio output	1-ch, RCA (Linear, 1 KΩ)		
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)		
Synchronous playback	4-ch	8-ch	16-ch
NETWORK			
Remote connections	32	64	128
Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface	



TBK-DVR1300 SERIES SPECIFICATIONS

AUXILIARY INTERFACE			
SATA	1 SATA interface	2 SATA interfaces	
Capacity	Up to 10 TB capacity for each disk		
Serial interface	RS-485 (half-duplex)		
USB interface	2 × USB 2.0	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0	
Alarm in/out	4/1	8/4	16/4
GENERAL			
Power supply	12 VDC		
Consumption (without HDD)	≤ 10 W	≤ 20 W	≤ 25 W
Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)		
Working humidity	10% to 90%		
Dimensions (W × D × H)	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)		380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)
Weights (without HDD)	≤ 1.16 kg (2.6 lb)	≤ 1.78 kg (3.9 lb)	≤ 2 kg (4.4 lb)

PHYSICAL INTERFACES

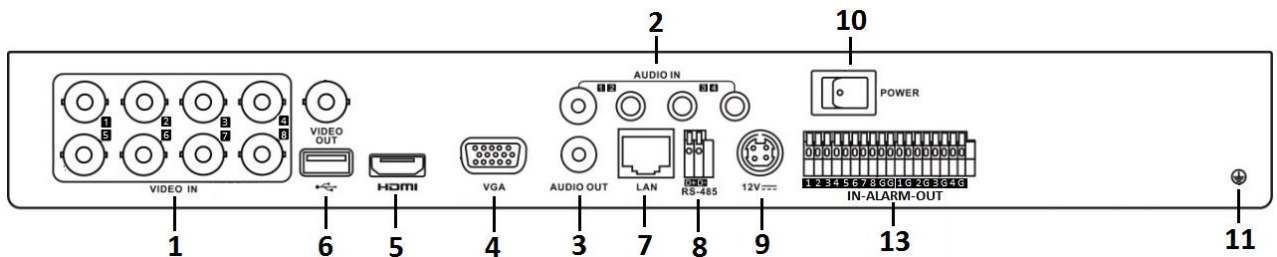

*: This corresponds to the rear panel of TBK-DVR1308. The rear panel of TBK-DVR1304/1316 provides 4/16 video input interfaces.

No.	DESCRIPTION	No.	DESCRIPTION
1	VIDEO IN	8	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	9	12 VDC Power Input
3	AUDIO OUT, RCA Connector	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	Alarm In/Out
7	LAN Network Interface		