



*Bullet IP camera, from TBK PLUS product range, H.265.
4 K (8 MP) resolution real time, providing an excellent video quality.
Autofocus motorized lens for a quick and precise adjustment.*

DATA SHEET

TBK-BUL7482EIR



MAIN FEATURES:

4K resolution real time.

Autofocus Motorized Lens 3.3-12 mm.

Sensitivity: 0.01 lux (F1.2, AGC ON).


48 IR LEDs, 30-50 m range.

Smart Functions. ROI encoding.

Audio and Alarm Input and Output.


PARAMETERS	DESCRIPTION
Image sensor	CMOS 1/2.5"
Resolution	4K (8MP, 3840x2160) @25 IPS
Minimum illumination	0.01 lux (F1.2, AGC ON)
Lens	Motorized autofocus 3.3-12 mm (lens angle 38.5-97.5°)
Day/Night	ICR
Encoding	H.265 MP/H.264 BL/MP/HP/MJPEG
Video out	RJ-45, and BNC (CVBS)
Audio - Alarm Input/Output	Audio and Alarm Input and Output
Transmission performance	10 simultaneous connections
Remote access	Android and IOS (iphone, ipad): TBK VMS-2020 PC: TBK VMS-3000. Web browser.
SD card	Micro SD card up to 128GB (not included)
Protocols	TCP, DHCP, NTP, FTP, RTSP, DDNS, SMTP
Privacy masks	4
Other functions	White Balance, Motion Detection, triple video streaming, DWDR, BLC, 2D/3D DNR, ROI, Smart Functions (Line Crossing, Intrusion, Video Exception).
IR Leds	48 IR LEDs. 30-50 m range
IP protection Rate	IP66
Power	12VDC 700mA (supply not included) and POE
Dimensions and weight	109x284 mm, 1112 g

DIMENSIONS:

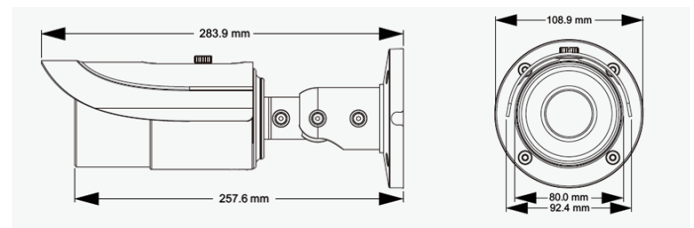

ACCESORIES:

Junction box TBK-361C

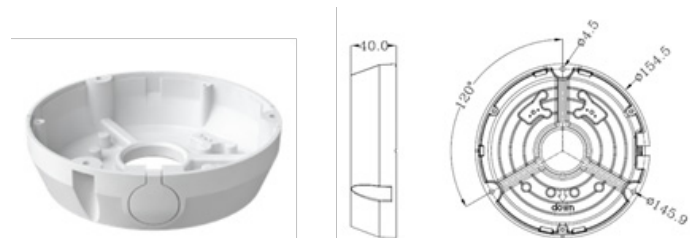

Junction box TBK-362C

